


# CrazyDrill Cool SST-Inox 6 x d

RECOMMENDATION FOR USE  
● Excellent | ● Good | ○ Acceptable | ⊗ Not recommended

P	N	S <sub>3</sub>
M	S <sub>1</sub>	H <sub>1</sub>
K	S <sub>2</sub>	H <sub>2</sub>

## DRILLING WITH INTERNAL COOLING | CUTTING DATA OVERVIEW

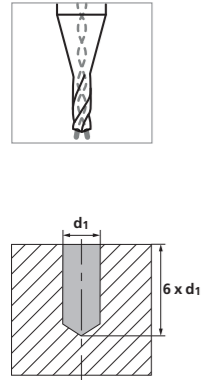

Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	v <sub>c</sub> [m/min]	f [mm/rev]																													
						Ød1 1.0 mm			Ød1 1.25 mm			Ød1 1.5 mm			Ød1 2.0 mm			Ød1 2.5 mm			Ød1 3.0 mm			Ød1 4.0 mm			Ød1 5.0 mm			Ød1 6.0 mm					
						Low	Mid	High	Low	Mid	High	Low	Mid	High	Low	Mid	High	Low	Mid	High	Low	Mid	High	Low	Mid	High	Low	Mid	High	Tief	Mid	High			
<b>P</b>	Unalloyed carbon steel R <sub>m</sub> < 800 N/mm <sup>2</sup>	1.0301	C10	AISI 1010																															
		1.0401	C15	AISI 1015																															
		1.1191	C45E/CK45	AISI 1045																															
		1.0044	S275JR	AISI 1020																															
	Low alloyed steel R <sub>m</sub> > 900 N/mm <sup>2</sup>	1.0715	11SMn30	AISI 1215																															
		1.5752	15NiCr13	ASTM 3415 / AISI 3310																															
		1.7131	16MnCr5	AISI 5115																															
		1.3505	100Cr6	AISI 52100																															
		1.7225	42CrMo4	AISI 4140																															
		1.2842	90MnCrV8	AISI O2																															
	High alloyed tool steel R <sub>m</sub> < 1200 N/mm <sup>2</sup>	1.2379	X153CrMoV12	AISI D2																															
		1.2436	X210CrW12	AISI D4/D6																															
		1.3343	HS6-5-2C	AISI M2 / UNS T11302																															
		1.3355	HS18-0-1	AISI T1 / UNS T12001																															
<b>M</b>		Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	60	80	100	0.010	0.020	0.030	0.013	0.025	0.038	0.015	0.030	0.045	0.020	0.040	0.060	0.025	0.050	0.075	0.030	0.060	0.090	0.040	0.080	0.120	0.050	0.100	0.150	0.060	0.120	0.180
			1.4105	X6CrMoS17	AISI 430F																														
	Stainless steel martensitic	1.4034	X46Cr13	AISI 420C	60	80	100	0.030	0.040	0.050	0.038	0.050	0.063	0.045	0.060	0.075	0.060	0.080	0.100	0.075	0.100	0.125	0.090	0.120	0.150	0.120	0.160	0.200	0.150	0.200	0.250	0.180	0.240	0.300	
		1.4112	X90CrMoV18	AISI 440B																															
	Stainless steel martensitic – PH	1.4542	X5CrNiCuNb 16-4	AISI 630 / ASTM 17-4 PH	60	80	100	0.020	0.030	0.040	0.025	0.038	0.050	0.030	0.045	0.060	0.040	0.060	0.080	0.050	0.075	0.100	0.060	0.090	0.120	0.080	0.120	0.160	0.100	0.150	0.200	0.120	0.180	0.240	
		1.4545	X5CrNiCuNb 15-5	ASTM 15-5 PH																															
	Stainless steel austenitic	1.4301	X5CrNi 18-10	AISI 304																															
		1.4435	X2CrNiMo 18-14-3	AISI 316L	60	80	100	0.020	0.030	0.040	0.025	0.038	0.050	0.030	0.045	0.060	0.040	0.060	0.080	0.050	0.075	0.100	0.060	0.090	0.120	0.080	0.120	0.160	0.100	0.150	0.200	0.120	0.180	0.240	
		1.4441	X2CrNiMo 18-15-3	AISI 316LM																															
		1.4539	X1NiCrMoCu 25-20-5	AISI 904L																															
<b>K</b>	Cast iron	0.6020	GG20	ASTM 30																															
		0.6030	GG30	ASTM 40B																															
		0.7040	GGG40	ASTM 60-40-18																															
		0.7060	GGG60	ASTM 80-60-03																															
		<b>N</b>	Aluminium alloy wrought	3.2315	AlMgSi1	ASTM 6351																													
3.4365	AlZnMgCu1.5			ASTM 7075																															
Aluminium alloy cast	3.2163		GD-AlSi9Cu3	ASTM A380																															
	3.2381		GD-AlSi10Mg	UNS A03590																															
Copper	2.004		Cu-OF / CW008A	UNS C10100																															
	2.0065		Cu-ETP / CW004A	UNS C11000																															
Brass lead free	2.0321		CuZn37 CW508L	UNS C27400																															
	2.036		CuZn40 CW509L	UNS C28000																															
Brass, Bronze R <sub>m</sub> < 400 N/mm <sup>2</sup>	2.0401		CuZn39Pb3 / CW614N	UNS C38500																															
	2.102		CuSn6	UNS C51900																															
Bronze R <sub>m</sub> < 600 N/mm <sup>2</sup>	2.0966		CuAl10Ni5Fe4	UNS C63000																															
	2.096	CuAl9Mn2	UNS C63200																																
<b>S<sub>1</sub></b>	Super alloys	2.4856		Inconel 625	30	40	50	0.010	0.015	0.020	0.013	0.019	0.025	0.015	0.023	0.030	0.020	0.030	0.040	0.025	0.038	0.050	0.030	0.045	0.060	0.040	0.060	0.080	0.050	0.075	0.100	0.060	0.090	0.120	
		2.4668		Inconel 718																															
		2.4617	NiMo28	Hastelloy B-2																															
		2.4665	NiCr22Fe18Mo	Hastelloy X																															
		3.7035	Gr.2	ASTM B348 / F67																															
<b>S<sub>2</sub></b>	Titanium pure	3.7065	Gr.4	ASTM B348 / F68																															
		3.7165	TiAl6V4	ASTM B348 / F136																															
		9.9367	TiAl6Nb7	ASTM F1295																															
<b>S<sub>3</sub></b>	CrCo alloys	2.4964	CoCr20W15Ni	Haynes 25	50	70	90	0.020	0.030	0.040	0.025	0.038	0.050	0.030	0.045	0.060	0.040	0.060	0.080	0.050	0.075	0.100	0.060	0.090	0.120	0.080	0.120	0.160	0.100	0.150	0.200	0.120	0.180	0.240	
			CrCoMo28	ASTM F1537																															
<b>H<sub>1</sub></b>	Hardened steel < 55 HRC	1.2510	100MnCrMoW4	AISI O1																															
		1.2379	X153CrMoV12	AISI D2																															